

Präzisionswerkzeuge
Made in Germany

Conzella[®]



PRÄZISIONSWERKZEUGE

Conzella Präzisionswerkzeuge GmbH
Auf Lichtenbol 1 | 72461 Albstadt
Fon +49 7432.5326

ERRECISA
SISTEMI PER PRODURRE

Reihe 104 Kop Slender Line

MITLAUFENDE PRÄZISIONS-DREHBANKSPITZE
PRECISION LIVE CENTER

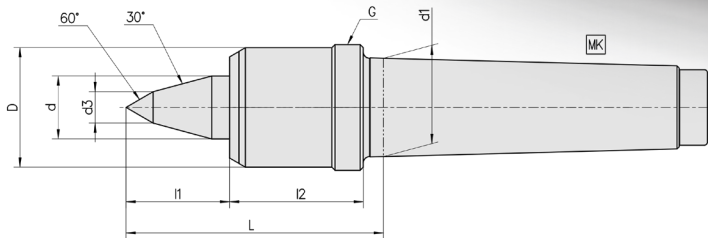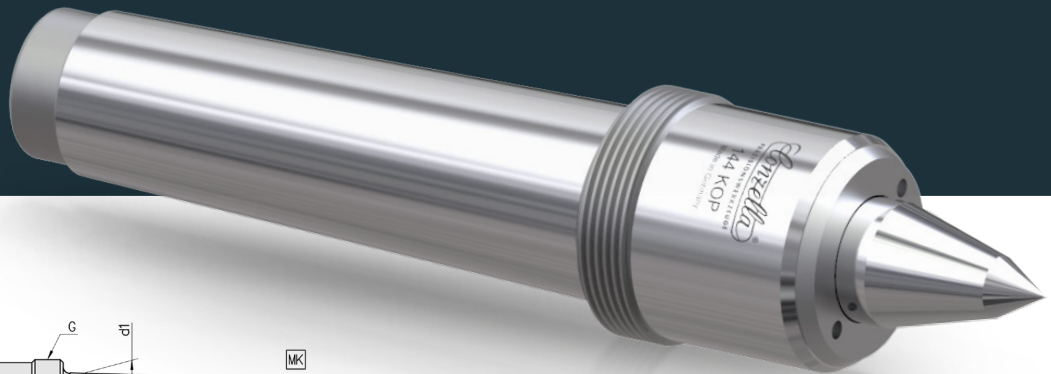

Type	MK	D	d	d1	L	l1	l2	d3	Drehzahl max. [1/min]	Werkstückgewicht max. [kg]	Rundlauf-Abweichung max. [mm]	Abdrückgewinde [G]	Axialdruck max. [kN]
Type	MT	D	d	d1	L	l1	l2	d3	Rotational frequency max. [1/min]	Workpiece weight max. [kg]	Concentricity run-out max. [mm]	Draw-off thread	Thrust load max. [kN]
124 KOP	2	26	12	17,78	59	21	38	6	6000	250	0,005	M 28x1,5	1,20
134 KOP	3	30	14	23,83	69	25	44	7	5000	500	0,005	M 32x1,5	2,50
144 KOP	4	38	20	31,27	82	33	49	10	4000	900	0,005	M 40x1,5	4,20
154 KOP	5	50	25	44,40	93	41	52	12	3000	1500	0,005	M 52x1,5	6,50

Proprietà del prodotto

- Contropunta rotante adatta per le macchine per la tornitura CNC
- Corpo estremamente ridotto, centraggio (KOP) per l'accessibilità ottimale del pezzo
- Incluso dado
- Accuratezza di run-out e ulteriore rigidità assiale attraverso cuscinetti di alto livello
- Corpo interamente temprato e rettificato
- Lubrificazione permanente senza manutenzione
- La guarnizione dell'albero rotante impedisce la penetrazione dello sporco e del refrigerante (KOP)

Product features

- Precision Live Center specifically for CNC lathes
- Extremely slim tool and center point [KOP] for optimal access to workpieces
- Draw-off nut included
- High run-out accuracy and additional axial stiffness through highend bearings
- Complete tool hardened and ground
- Maintenance-free permanent lubrication
- Rotary shaft seal prevents penetration of dirt and coolant